

Item # DC 10, DC Series Chemically Cleanable Desuperheaters (5 to 100 tons)




Heat recovery unit for domestic hot water from air conditioning and refrigeration systems up to 100 tons

DC Series Chemically Cleanable Commercial Desuperheaters recycle rejected heat from your air conditioning or refrigeration system and use it to heat water or other fluids. At the same time, desuperheating lowers refrigerant temperature and pressure, reducing energy input to the compressor. You save by reducing or eliminating the energy required for water heating while increasing the efficiency of the air conditioning/refrigeration system.

- Heats potable water up to 140 °F using waste heat
- · Typical Payback Period of Two Years or Less
- Reduces A/C operating costs 5% to 10%
- Chemically Cleanable Counterflow Design
- Compact and Ready to Install
- Works with All Major Manufacturers' Systems

Specifications		
TR	10 tons	
Application	 Domestic Hot Water Heating Process Water Heating Space Heating Pool Heating Hot Deck Reheat Sub-Soil Heating Restaurants Hotels/Motels Hospitals Schools Food Processing Ice Rinks Dormitories 	
# Circuits	1	
Cleanability	Chemical	
Refrig. Conn.	1 1/8 " OD/ID	



















Water Conn.	5/8" OD	
Length	49 1/8 "	
Width	2-7/8 "	
Height	22-1/2 "	
Weight	70 lbs	

Mechanical Specifications	
Optional Pump	Grundfos UP15-29SU, Circulating Pump (\$740.00)
Heat Exchanger	Chemically cleanable, vented double wall, U.L. listed, 450 psig shell side DWP (optional 600 psig), 300 psig tube side DWP
Cabinet	0.040" Aluminum Alloy, insulated, weather-resistant cabinet, with removable service panel. Bottom mounting rails provided as standard.






Phone: 717-845-8746 Toll-free: 800-445-7511 Fax: 717-845-2864










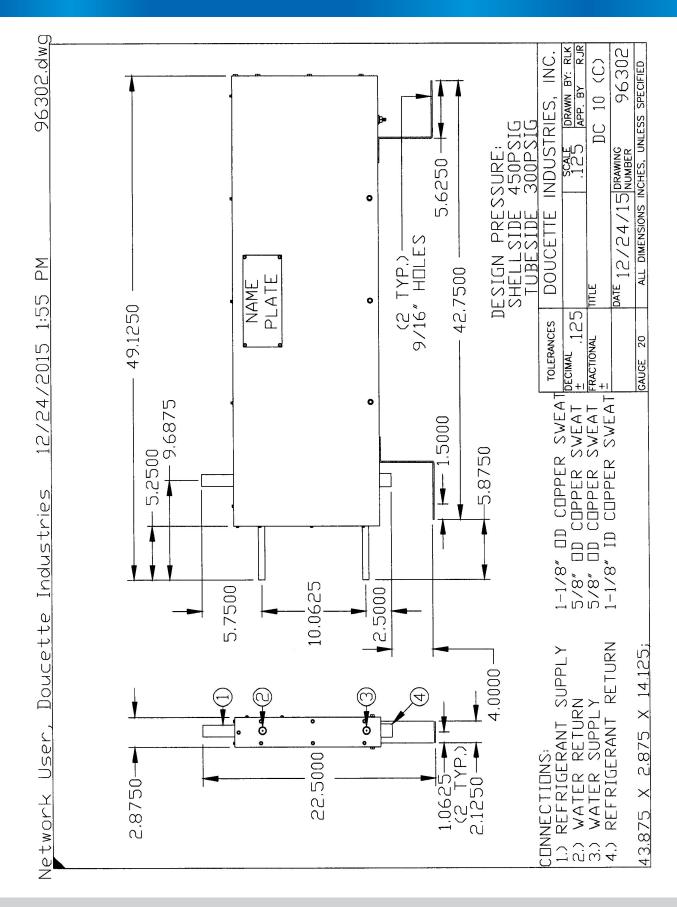







Phone: 717-845-8746 Toll-free: 800-445-7511 Fax: 717-845-2864





