


Item # DC 10, DC Series Chemically Cleanable Desuperheaters (5 to 100 tons)

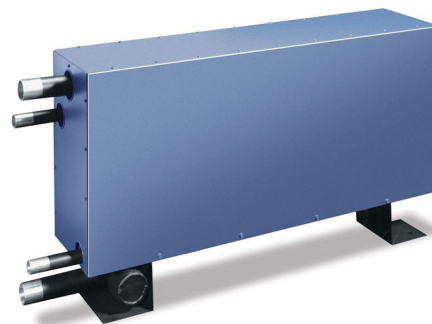

\$2,755.00

Heat recovery unit for domestic hot water from air conditioning and refrigeration systems up to 100 tons

DC Series Chemically Cleanable Commercial Desuperheaters recycle rejected heat from your air conditioning or refrigeration system and use it to heat water or other fluids. At the same time, desuperheating lowers refrigerant temperature and pressure, reducing energy input to the compressor. You save by reducing or eliminating the energy required for water heating while increasing the efficiency of the air conditioning/refrigeration system.

- Heats potable water up to 140 °F using waste heat
- Typical Payback Period of Two Years or Less
- Reduces A/C operating costs 5% to 10%
- Chemically Cleanable Counterflow Design
- Compact and Ready to Install
- Works with All Major Manufacturers' Systems

Specifications

TR	10 tons	
Application	• Domestic Hot Water Heating • Process Water Heating • Space Heating • Pool Heating • Hot Deck Reheat • Sub-Soil Heating • Restaurants • Hotels/Motels • Hospitals • Schools • Food Processing • Ice Rinks • Dormitories	
# Circuits	1	
Cleanability	Chemical	
Refrig. Conn.	1 1/8 " OD/ID	



20 Leigh Drive,
York, Pennsylvania 17406-8474



Website: www.doucetteindustries.com



Phone: 717-845-8746
Fax: 717-845-2864



Commercial/Industrial: johnL@doucetteindustries.com
Residential/Light Commercial: johnL@doucetteindustries.com

Water Conn.	5/8" OD
Length	49 1/8 "
Width	2-7/8 "
Height	22-1/2 "
Weight	70 lbs

Mechanical Specifications

Optional Pump	Grundfos UP15-29SU, Circulating Pump (\$740.00)
Heat Exchanger	Chemically cleanable, vented double wall, U.L. listed, 450 psig shell side DWP (optional 600 psig), 300 psig tube side DWP
Cabinet	0.040" Aluminum Alloy, insulated, weather-resistant cabinet, with removable service panel. Bottom mounting rails provided as standard.



20 Leigh Drive,
York, Pennsylvania 17406-8474



Phone: 717-845-8746
Fax: 717-845-2864



Website: www.doucetteindustries.com




Commercial/Industrial: johnL@doucetteindustries.com
Residential/Light Commercial: johnL@doucetteindustries.com



doucette
industries, inc

Network User, Doucette Industries 12/24/2015 1:55 PM 96302.dwg

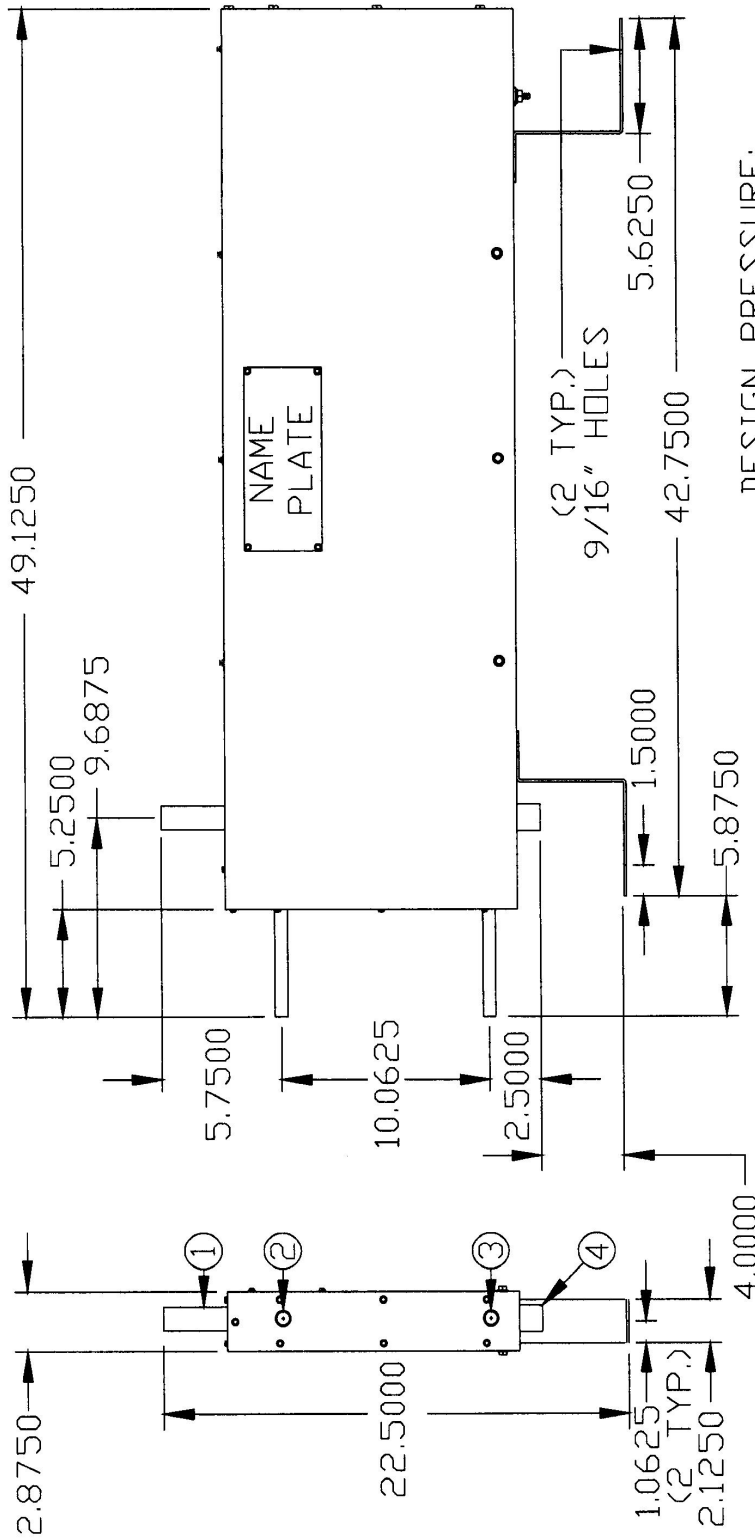

DESIGN PRESSURE:
SHELLSIDE 450PSIG
TUBESIDE 300PSIG

CONNECTIONS:	1-1/8" OD COPPER SWEAT	TOLERANCES	DOUCETTE INDUSTRIES, INC.
1.) REFRIGERANT SUPPLY	1-1/8" OD COPPER SWEAT	DECIMAL .125	SCALE .125
2.) WATER RETURN	5/8" OD COPPER SWEAT	FRACTIONAL	DRAWN BY: RLK
3.) WATER SUPPLY	5/8" OD COPPER SWEAT		APP. BY: RJR
4.) REFRIGERANT RETURN	1-1/8" ID COPPER SWEAT		TITLE DC 10 (C)
43.875 X 2.875 X 14.125;		DATE 12/24/15	DRAWING NUMBER 96302
		GAUGE 20	ALL DIMENSIONS INCHES, UNLESS SPECIFIED



20 Leigh Drive,
York, Pennsylvania 17406-8474



Phone: 717-845-8746
Fax: 717-845-2864



Website: www.doucetteindustries.com



Commercial/Industrial: johnL@doucetteindustries.com
Residential/Light Commercial: johnL@doucetteindustries.com